


CONNECTION: THREADS DIRECTLY INTO SAEJ1926,-8 PORT
(NOMINAL 1/2" TUBE OD)
NOMINAL CRACKING PRESSURE: 10 - 20 PSI

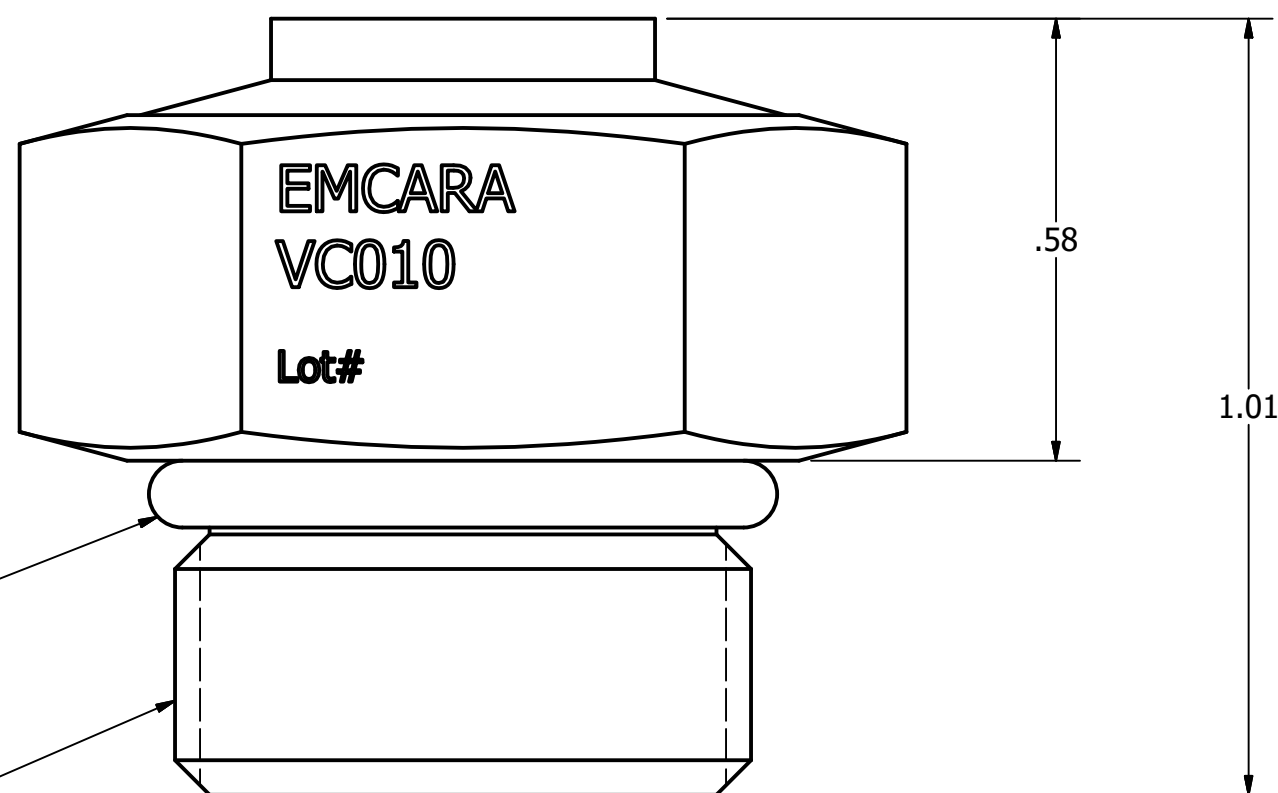

NITRILE O-RING

SAE J1926,-8
3/4-16 UNF - 2A

THREADS DIRECTLY INTO
EMCARA PRD

NOTES:
1. ALL EXTERNAL MATERIALS ARE STAINLESS STEEL
2. VITON O-RING ON POPPET
3. NITRILE O-RING ON SAE GLAND

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT.				
UNLESS OTHERWISE STATED: ALL DIMENSIONS ARE IN IMPERIAL INCHES TOLERANCE: ONE PLACE DEC. = ±.05 TWO PLACE DEC. = ±.01 THREE PLACE DEC. = ±.005 ANGLE = ± 1'				
MATERIAL:				
FINISH:		SIZE C	DWG. NO. VC010	REV NC
DO NOT SCALE DRAWING		SCALE: 4 : 1	WEIGHT: N/A	SHEET 1 OF 1